



BOOSTER DWG

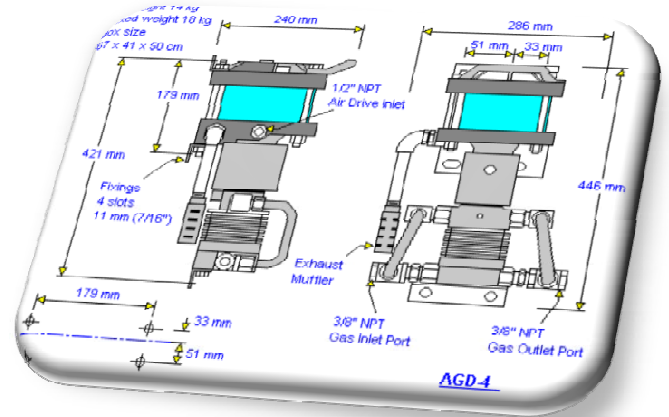

****** SPECIFICATION ******

- STANDARD GAS BOOSTER MODEL : *HAG-AGD-4-P-T2L*
- WORKING PRESSURE (P-1) : 2.5Mpa. (25BAR)
(AIR DRIVEN PRESSURE = 0.6Mpa AIR DRIVEN)
- WORKING PRESSURE (P-2) : 2.5Mpa. (25BAR)
(GAS CONTROL TYPE : GAS REGULATOR CONTROL)
- MINIMUM GAS INLET PRESSURE : ATM. (0.0BAR)
- GAS BOOSTER M/K : *HASKEL®*
- PRESSURE & FLOW RAGE (P=BAR , FL=nl/min)

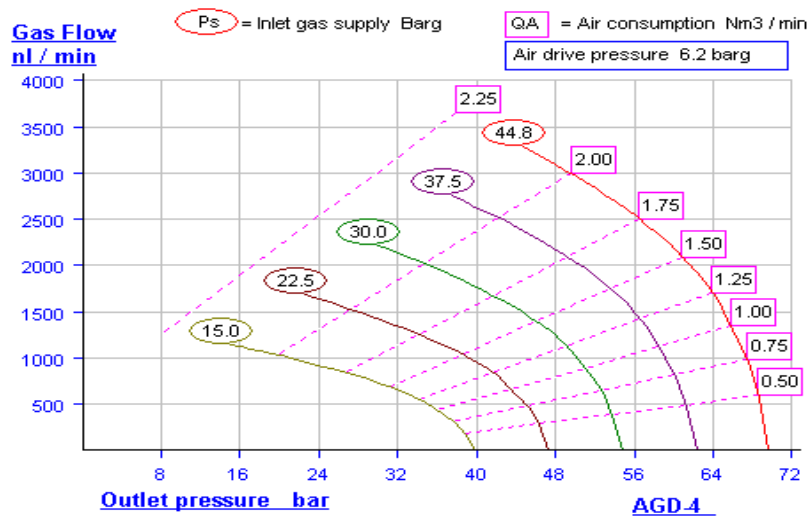

- STANDARD GAS RECEIVER : 2L STANLESS STEEL
- PRESSURE GAUGE : AIR = 100mm X 1Mpa TYPE = BD
GAS INLET PRESSURE = 100mm X 1Mpa TYPE = BD
GAS OUTLET PRESSURE (P=1) = 100mm X 4Mpa TYPE = BD
GAS OUTLET PRESSURE (P=2) = 100mm X 4Mpa TYPE = BD