 # BOOSTER DWG

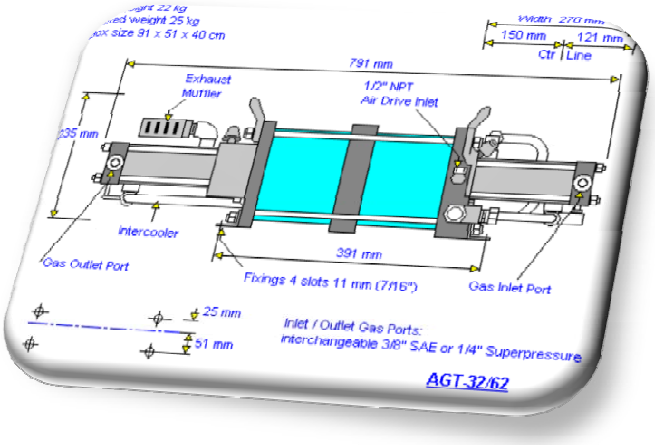

****** SPECIFICATION ******

- **STANDARD GAS BOOSTER MODEL : *HAG-AGT-32/62-P-T500***
- **WORKING PRESSURE (P-1) : 37Mpa. (370BAR)**
  (AIR DRIVEN PRESSURE = 0.65Mpa AIR DRIVEN)
- **WORKING PRESSURE (P-2) : 37Mpa. (370BAR)**
  (GAS CONTROL TYPE : GAS REGULATOR CONTROL)
- **MINIMUM GAS INLET PRESSURE : 0.7Mpa. (7BAR)**
- **GAS BOOSTER M/K : *HASKEL ®***

- **PRESSURE & FLOW RAGE (P=BAR , FL=nl/min)**

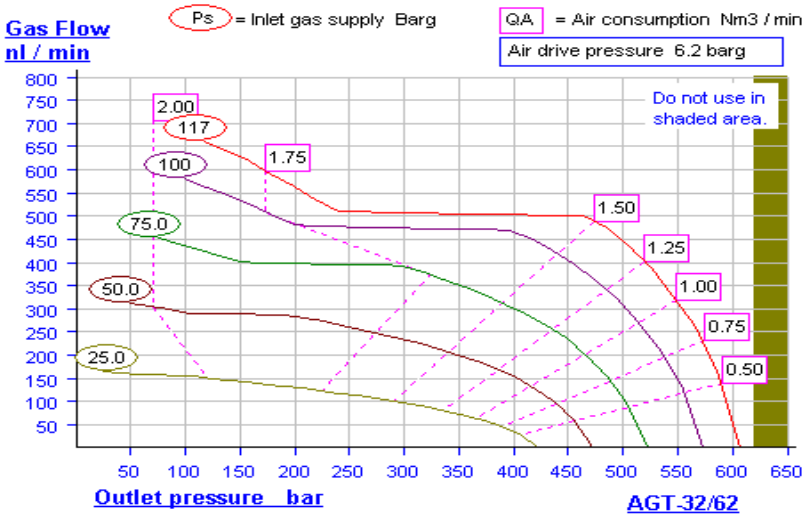

- **STANDARD GAS RECEIVER : 500ml STANLESS STEEL**
- **PRESSURE GAUGE : AIR = 100mm X 1Mpa TYPE = BD**
  GAS INLET PRESSURE = 100mm X 15Mpa TYPE = BD
  GAS OUTLET PRESSURE (P=1) = 100mm X 40Mpa TYPE = BD
  GAS OUTLET PRESSURE (P=2) = 100mm X 40Mpa TYPE = BD

TEL : +82-32-822-2532 FAX : +82-32-822-2535